



สวิตช์ลู่กลอย C-AFR1 8 ขาไม่แถมซ็อกเก็ต



ราคา 800 บาท



LOADLESS RELAY C-AFR1

■ FEATURES:

- Suitable for water supply and drainage.
- Plug in assembly, compact volume, easy for installation and replacement.
- Probes E1-E3 are live with low voltage (A.C. 8 volts)
- LED are provided to indicate operating condition.

SPECIFICATIONS:

- RATED VOLTAGE : 110 or 220V AC.
- CONTROL OUTPUT : 250V 5AAC.
- OPERATING VOLTAGE RANGE : 85 TO 110% OF RATED VOLTAGE

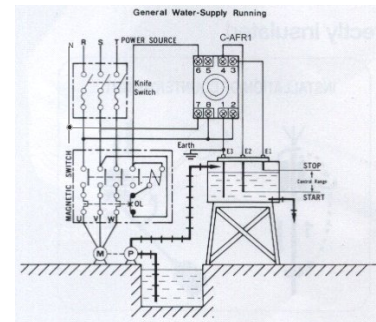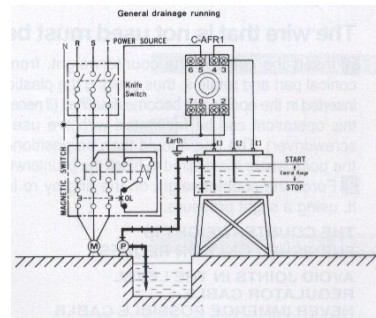

CONNECTIONS

General water-supply or drainage running

1. WATER SUPPLY

- Connect electromagnetic switch coil terminal MS to 6.
- The pump stops when water level reaches E1 and starts when water level drops below E2.

2. DRAINAGE

- Connect electromagnetic switch coil terminal MS to 5.
- Pump starts when water level reaches E1 and stops when level drops below E2.



โซลินอยด์ เบรก

SOLENOID	PUSH OR PULL	RATED STROKE (mm)	RATED PULL (KG)	RATE SERVICE	RATE VOLTAGE (AC)	RATE CYCLES	LxWxH	PLUNGER WEIGHT (kg)	TOTAL WEIGHT (kg)	ราคา
TAS-5 220V	Push Pull Combined	15	1	Continuous	220 V	50/60 HZ	93x49x50	0.114	0.40	680
TAS-10 220V		15	1.5				93x53x50	0.138	0.45	750
TAS-15 220V		15	2				93x57x50	0.153	0.50	900
TAS-30 220V		20	5				130x80x63	0.393	1.45	1,700
TAS-15 110V		15	2		110 V		93x57x50	0.153	0.50	900